


HSV	Channel	Function	Value	Percent/Setting
	1	Hue	000 ⇄ 255	0~100%
	2	Saturation	000 ⇄ 255	0~100%
	3	Value	000 ⇄ 255	0~100%



Quick Reference Guide

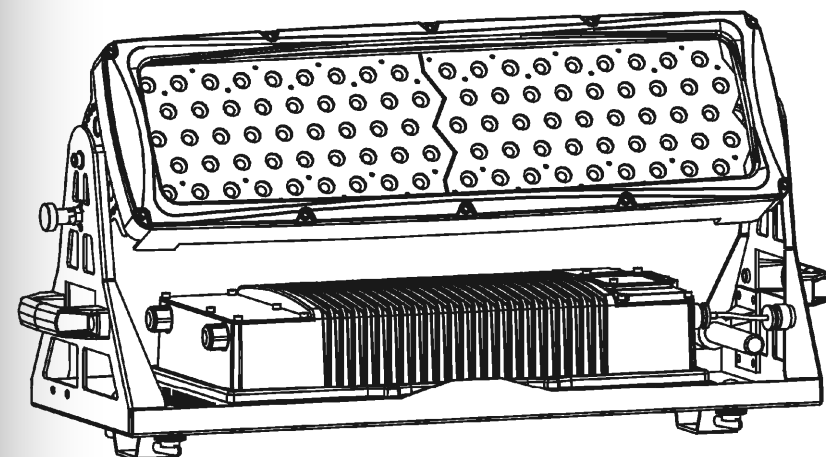

Contact Us World Headquarters

General Information

CHAUVET®
5200 NW 108th Avenue
Sunrise, FL 33351
Voice: (954) 929-1115
Fax: (954) 929-5560
Toll free: (800) 762-1084

Technical Support

Voice: (954) 929-1115 (Press 4)
Fax: (954) 756-8015

World Wide Web

www.chauvetlighting.com

COLORado Ridge IP QRG – Rev. 01c

© Copyright 2010 CHAUVET®

All rights reserved

Printed in the P. R. C.



It's Green Thinking

About this Guide

The COLORado Ridge IP Quick Reference Guide (QRG) only contains the product's connection and mounting information as well as the menu options and the DMX values.

Disclaimer

- This Quick Reference Guide DOES NOT replace the product's user manual, which you can download from the CHAUVET® Web site (www.chauvetlighting.com).
- You must read ALL the disclaimers and safety notes in this document as well as those in the product's user manual before installing, operating, or maintaining this product.

Safety Notes

- DO NOT open this fixture unless instructed. It contains no user serviceable parts.
- DO NOT look at the light source when this fixture is on.
- DO NOT touch the fixture when it is operating because it may be hot.
- DO NOT install or operate this fixture where there is less than 50 cm to the nearest surface to allow adequate ventilation around it.
- DO NOT leave any flammable material within 50 cm from this fixture while operating or connected to the power outlet to minimize the risk of fire.
- DO NOT carry this fixture from the head; use the handles instead.
- DO NOT install this product alone. This fixture weighs 53 lbs (24 kg). Always ask for help when mounting this product to avoid personal injuries or damage to the unit.
- DO NOT mount this fixture overhead without using a safety cable.
- DO NOT submerge this product (IP66). Regular outdoor operation is fine.
- DO NOT operate this fixture if you see damage on the housing, lenses, or cables. In any of these cases, have the damaged parts replaced by an authorized technician at once.
- DO NOT connect this fixture to a dimmer or rheostat.
- ONLY connect this fixture to a grounded and protected circuit.

What is Included

- One COLORado Ridge IP
- One Edison to proprietary IP66 power input adapter
- One male and female 3-pin DMX to proprietary IP66 adapter
- One safety cable
- Warranty Card
- Quick Reference Guide

TOUR (Cont.)

Channel	Function	Value	Percent/Setting
10	Auto Speed	000 ⇄ 255	Only when running an auto program
11	Dimmer Speed	000 ⇄ 009 010 ⇄ 029 030 ⇄ 069 070 ⇄ 129 130 ⇄ 189 190 ⇄ 255	Dimmer speed as per Control Panel Linear dimmer Non-linear dimmer 1 (fastest) Non-linear dimmer 2 Non-linear dimmer 3 Non-linear dimmer 4 (slowest)

ARC1

Channel	Function	Value	Percent/Setting
1	Red	000 ⇄ 255	0~100%
2	Green	000 ⇄ 255	0~100%
3	Blue	000 ⇄ 255	0~100%

AR1.D

Channel	Function	Value	Percent/Setting
1	Dimmer	000 ⇄ 255	0~100%
2	Red	000 ⇄ 255	0~100%
3	Green	000 ⇄ 255	0~100%
4	Blue	000 ⇄ 255	0~100%

ARC3

Channel	Function	Value	Percent/Setting
1	Red	000 ⇄ 255	0~100%
2	Green	000 ⇄ 255	0~100%
3	Blue	000 ⇄ 255	0~100%
4	White	000 ⇄ 255	0~100%
5	Amber	000 ⇄ 255	0~100%

AR3.D

Channel	Function	Value	Percent/Setting
1	Dimmer	000 ⇄ 255	0~100%
2	Red	000 ⇄ 255	0~100%
3	Green	000 ⇄ 255	0~100%
4	Blue	000 ⇄ 255	0~100%
5	White	000 ⇄ 255	0~100%
6	Amber	000 ⇄ 255	0~100%

AR3.S

Channel	Function	Value	Percent/Setting
1	Dimmer	000 ⇄ 255	0~100%
2	Red	000 ⇄ 255	0~100%
3	Green	000 ⇄ 255	0~100%
4	Blue	000 ⇄ 255	0~100%
5	White	000 ⇄ 255	0~100%
6	Amber	000 ⇄ 255	0~100%
7	Strobe	000 ⇄ 255	0~20 Hz

DMX Values

<i>TOUR</i>	Channel	Function	Value	Percent/Setting
	1	Dimmer	000 ⇔ 255	0~100%
	2	Module 1 Red	000 ⇔ 255	0~100%
		Step Time		Only when running custom programs
	3	Module 1 Green	000 ⇔ 255	0~100%
		Step Time		Only when running custom programs
	4	Module 1 Blue	000 ⇔ 255	0~100%
	5	Module 1 White	000 ⇔ 255	0~100%
	6	Module 1 Amber	000 ⇔ 255	0~100%
	7	Color Macro + White Balance	000 ⇔ 010 No function 011 ⇔ 030 R: 100% G: Up B: 0% 031 ⇔ 050 R: Down G: 100% B: 0% 051 ⇔ 070 R: 0% G: 100% B: Up 071 ⇔ 090 R: 0% G: Down B: 100% 091 ⇔ 110 R: Up G: 0% B: 100% 111 ⇔ 130 R: 100% G: 0% B: Down 131 ⇔ 150 R: 100% G: Up B: Up 151 ⇔ 170 R: Down G: Down B: 100% 171 ⇔ 200 R: 100% G: 100% B: 100% W: 100% 201 ⇔ 205 White 1: 3200 K 206 ⇔ 210 White 2: 3400 K 211 ⇔ 215 White 3: 4200 K 216 ⇔ 220 White 4: 4900 K 221 ⇔ 225 White 5: 5600 K 226 ⇔ 230 White 6: 5900 K 231 ⇔ 235 White 7: 6500 K 236 ⇔ 240 White 8: 7200 K 241 ⇔ 245 White 9: 8000 K 246 ⇔ 250 White 10: 8500 K 251 ⇔ 255 White 11: 10,000 K	
	8	Strobe	000 ⇔ 010 No Function 011 ⇔ 255 0~20 Hz	
	9	Auto + Custom Programs	000 ⇔ 040 No function 041 ⇔ 050 Auto 1 051 ⇔ 060 Auto 2 061 ⇔ 070 Auto 3 071 ⇔ 080 Auto 4 081 ⇔ 090 Auto 5 091 ⇔ 100 Auto 6 101 ⇔ 110 Auto 7 111 ⇔ 120 Auto 8 121 ⇔ 130 Auto 9 131 ⇔ 140 Auto 10 141 ⇔ 150 Custom 1 151 ⇔ 160 Custom 2 161 ⇔ 170 Custom 3 171 ⇔ 180 Custom 4 181 ⇔ 190 Custom 5 191 ⇔ 200 Custom 6 201 ⇔ 210 Custom 7 211 ⇔ 220 Custom 8 221 ⇔ 230 Custom 9 231 ⇔ 255 Custom 10	

Features


- 3, 4, 5, 6, 7, 10, or 11 channels RGBWA LED wash light with two tiltable panels
- Operating modes:
 - 3-channel: HSV control
 - 3-channel: RGB control
 - 4-channel: RGB, dimmer
 - 5-channel: RGBWA control
 - 6-channel: RGBWA, dimmer
 - 7-channel: RGBWA, dimmer, strobe
 - 11-channel: Dimmer, RGBWA, color macro, strobe, auto/custom, auto speed, dimmer curve
- RGBWA static color mixing with or without DMX control
- Color temperature presets (3,200~10,000 K)
- Built-in (auto) programs
- Customizable (custom) programs
- Recall auto/custom programs via DMX
- Five distinct dimming curves
- Ingress Protection: IP66
- 3-pin DMX input and output connectors
- LED display with password protection
- Die-cast aluminum, powder coated housing
- Color calibration
- Omega bracket mounting system

Options

- 15° optical system CLENS1590
- 30° optical system CLENS3090
- 16.4 ft (5 m) IP66 power extension cable IP5POWER
- 16.4 ft (5 m) IP66 signal extension cable IP5SIG
- W-DMX (wireless DMX) receiver W-DMXIP66
- W-DMX (wireless DMX) transmitter W-DMXTRANS

AC Power This product has an auto-ranging power supply that can work with an input voltage range of 100~240 VAC, 50/60 Hz.

Mounting Before mounting this product, read the safety notes at the beginning of this guide and on page 2 of the product's user manual. Then, follow the mounting procedure indicated in the Setup chapter of the user manual.

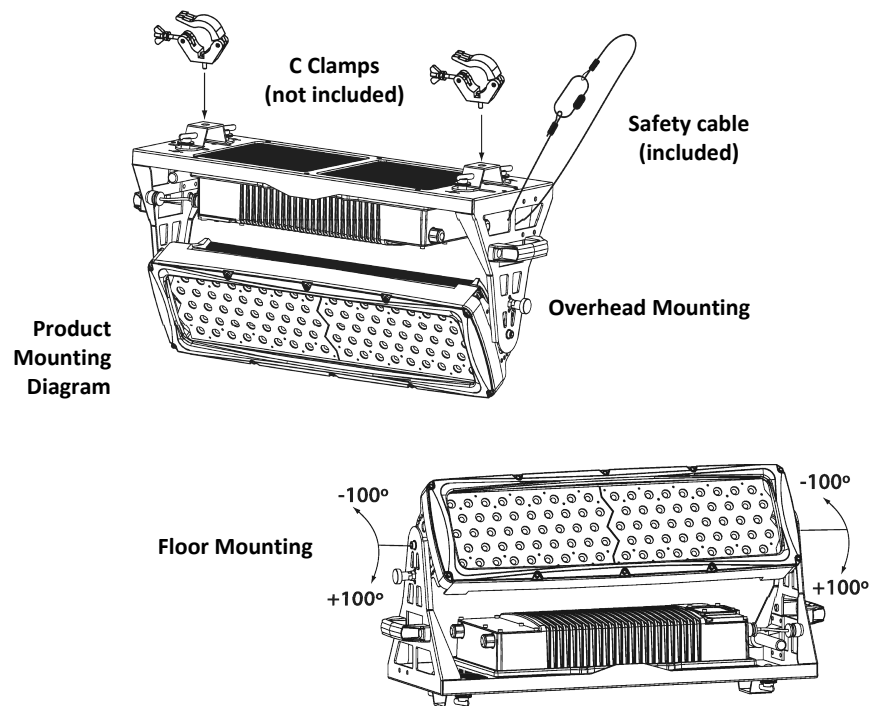

Control Panel Description

Button	Function
<MENU>	Exits from the current menu or function
<SET>	Enables the currently displayed menu or sets the currently selected value into the selected function
<UP>	Navigates upwards through the menu list and increases the numeric value when in a function
<DOWN>	Navigates downwards through the menu list and decreases the numeric value when in a function

Programming For details on how to program this product, please refer to the product's user manual.

Password After being prompted to enter the password, press:
<UP>, <DOWN>, <UP>, <DOWN>, and <ENTER>

Menu Options

Main Level	2 nd Level		3 rd Level		Description
STAT	RED		000~255 (0~100%)		User can combine Red, Green, Blue, White, and Amber to generate a custom color.
	GREEN				
	BLUE				
	WHITE				
	AMBER				
	STRB		00~20 (0~20 Hz)		Select a strobe frequency
AUTO	AUTO		1~10		Choose from 10 automatic programs
	CUSTOM				Choose from 10 customizable programs
ADDR	001~512		N/A		Sets the DMX starting address
RUN	DMX/SLAV		N/A		Selects the DMX or SLAVE mode
PERS	TOUR		N/A		11-channel
	ARC 1				3-channel
	AR1.D				4-channel
	ARC.3				5-channel
	AR3.D				6-channel
	AR3.S				7-channel
	HSV				3-channel
SET	UPLD	PSWD	SEND	END	Uploads custom programs
	REST	PSWD	RST	END	Resets the fixture to the factory settings
	DIM		OFF		Faders act linearly
			DIM1~4		DIM1 (fastest)~DIM4 (slowest)
	COLOR		OFF		No color compensation
			RGBW		White is defined by CAL2 > RGB.W
			UC		Color compensation to match older fixtures
EDIT	PR (1~10)	SC (01~30)	RED	000~255	User can combine Red, Green, Blue, White, and Amber to generate a custom color.
			GREEN		
			BLUE		
			WHITE		
			AMBER		
	STRB	00~20	Selects the strobe frequency (0~20 Hz)		
	TIME	000~255	Defines the step duration (0~100%)		
FADE	Defines the fade duration (0~100%)				
CAL1	WH (1~11)		RED	000~255	User can combine Red, Green, Blue, White, and Amber to generate whites with various temperatures (TOUR > Channel 7).
			GREEN		
			BLUE		
			WHITE		
			AMBER		
CAL2	RGB.W		RED	000~255	User can combine Red, Green, and Blue to generate a balanced white (SET > COLOR >RGBW)
			GREEN		
			BLUE		
WDMX	ACTI		ON/OFF		Activates W-DMX connection
	REST				Resets W-DMX connection
KEY	ON/OFF		N/A		Turns the password on or off